

NP Type Battery

- Li-ion/Ni-MH rechargeable battery, no memory effect
- 4-level LED power indicator.
- Built-in intelligent management & capacity management circuit.
- Compatible with all the broadcast video cameras using NP type battery pack.



Model: NP-65
 Voltage: 14.8V
 Capacity: 65Wh
 Operation temperature: -30°C~+55°C
 Dimensions: 184x71x25mm
 weight: 650g

PSP Battery




Model	Voltage	Capacity
ET-BLA440	5V	4400mAh
ET-BLB440	5V	4400mAh
ET-BLB510	5V	5100mAh
ET-BLB660	5V	6600mAh

Portable Charger

ET-2LA



ET-2LS

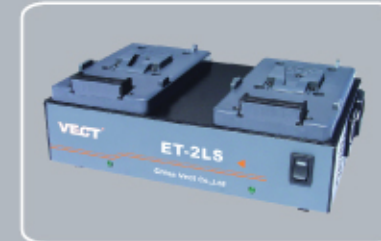

ET-4LA



ET-4LS



- Two-channel simultaneous charger for Gold mount Li-ion/Ni-CD/Ni-MH batteries.
- With camera DC power supply.
- Technical Specifications
 Input: AC90~242V 47~63Hz
 Output: Charge: 16.8V 3.0A
 DC: 12V 50W
 Dimensions: 145×68×225mm
 Weight: 1500g
 Operation Temperature: -10~35°C

- Two-channel simultaneous charger for V Lock Li-ion/Ni-CD/Ni-MH batteries.
- With camera DC power supply.
- Technical Specifications
 Input: AC90~242V 47~63Hz
 Output: Charge: 16.8V 3.0A
 DC: 12V 50W
 Dimensions: 145×78×224mm
 Weight: 1500g
 Operation Temperature: -10~35°C

- Four-channel simultaneous charger for Gold mount Li-ion/Ni-CD/Ni-MH batteries.
- With camera DC power supply.
- Technical Specifications
 Input: AC90~242V 47~63Hz
 Output: Charge: 16.8V 6.0A
 DC: 12V 50W
 Dimensions: 226×320×82mm
 Weight: 2000g
 Operation Temperature: -10~35°C

- Four-channel simultaneous charger for V Lock Li-ion/Ni-CD/Ni-MH batteries.
- With camera DC power supply.
- Technical Specifications
 Input: AC90~242V 47~63Hz
 Output: Charge: 16.8V 6.0A
 DC: 12V 50W
 Dimensions: 228×320×90mm
 Weight: 2000g
 Operation Temperature: -10~35°C